

FIGURE 1

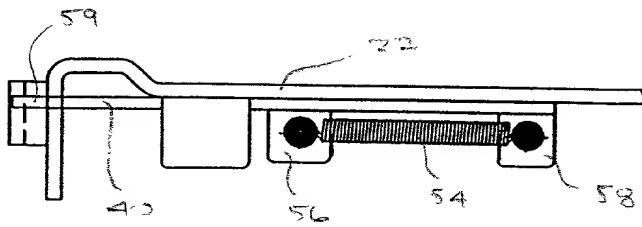


FIGURE 3

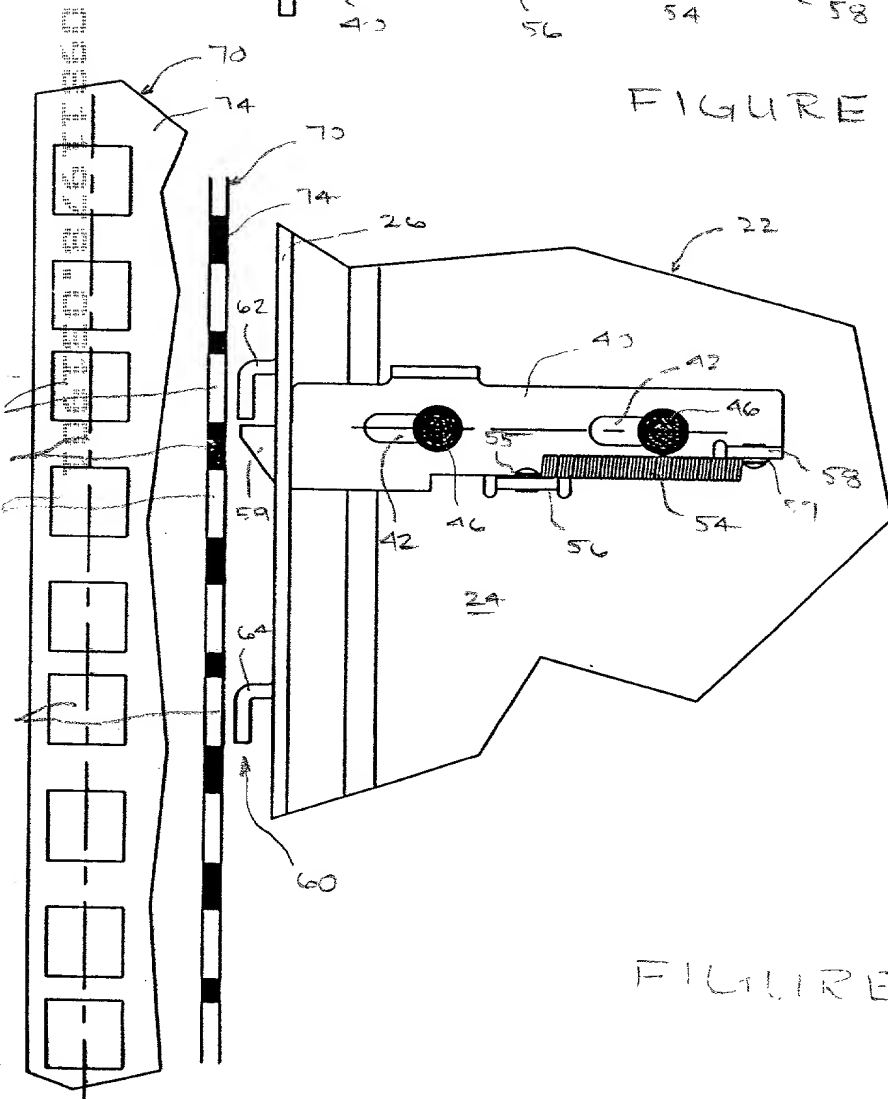


FIGURE 2

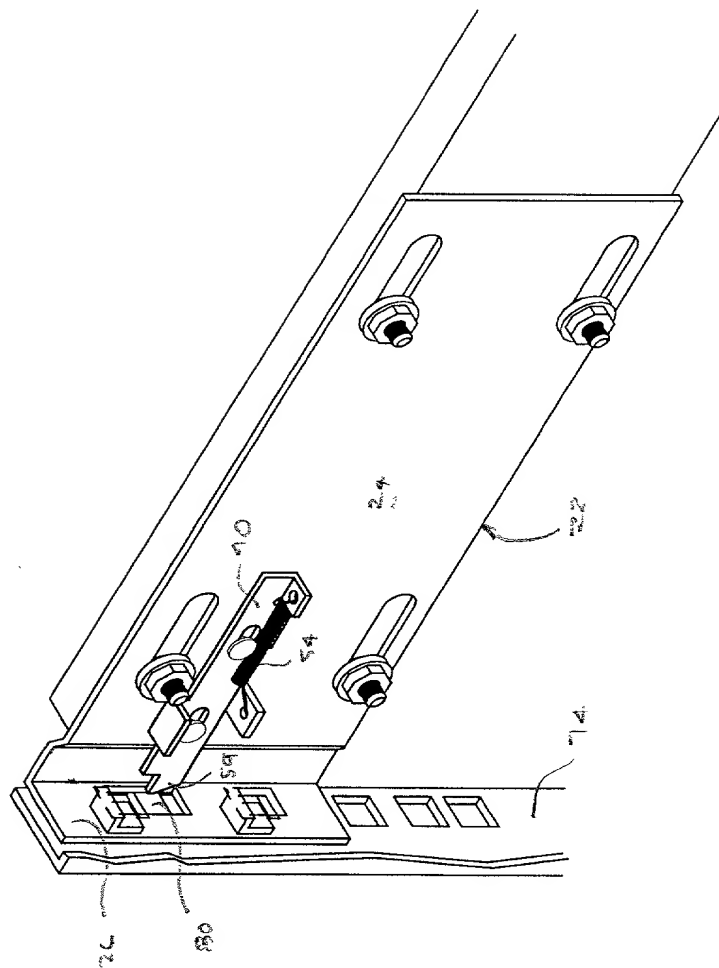


FIGURE 1

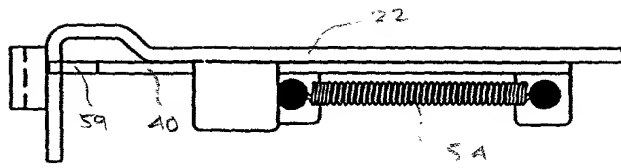


FIGURE 6

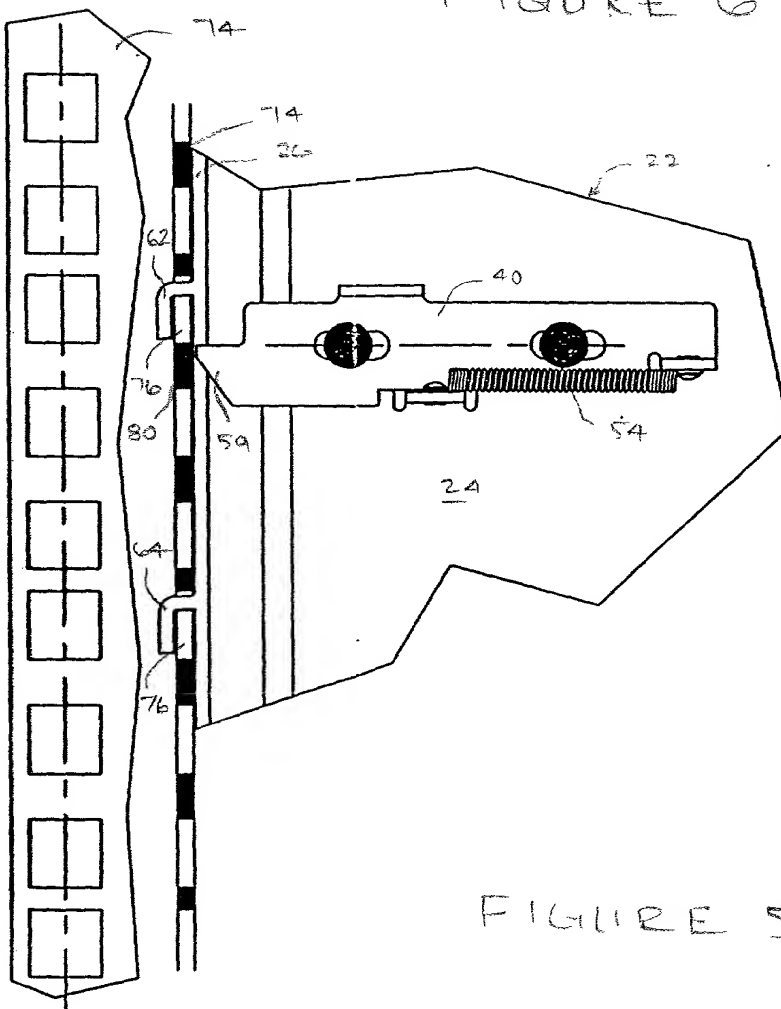


FIGURE 5

FIG. 1 is a perspective view of the device in accordance with the present invention, showing the device in a closed position. The device includes a main body 10, a handle 20, and a locking mechanism 30. The handle 20 is pivotally connected to the main body 10 at a pivot point 40. The locking mechanism 30 is located on the main body 10 and includes a locking pin 50 and a locking plate 60. The device is shown in a closed position, with the handle 20 aligned with the main body 10.

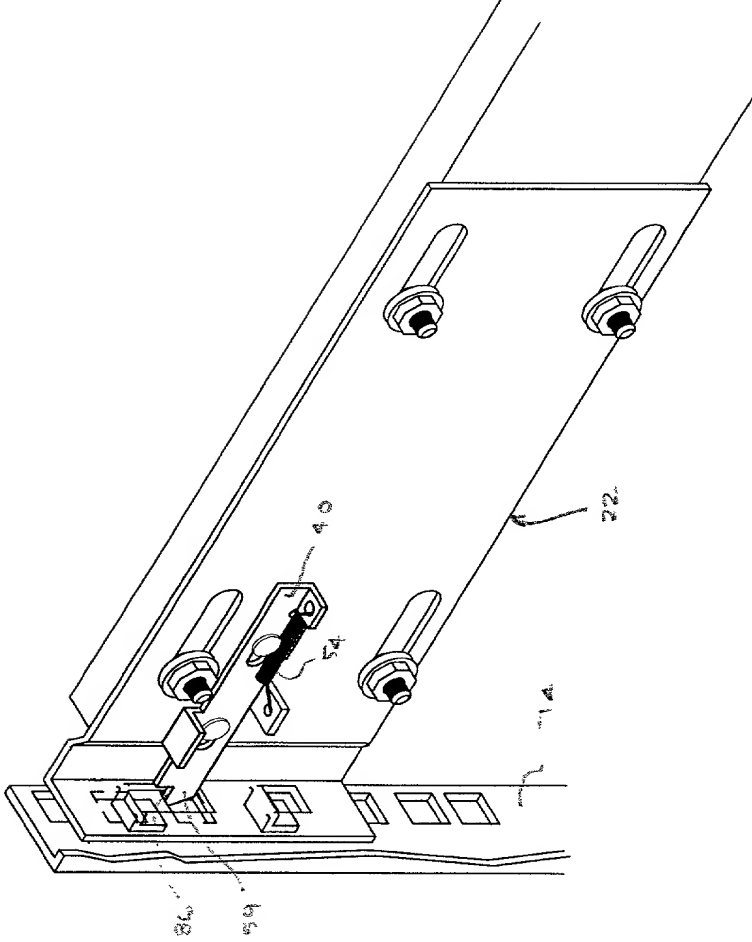


FIG. 1

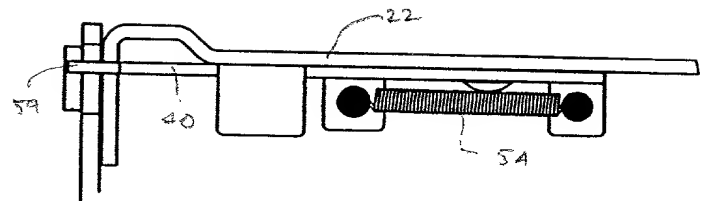


FIGURE 9



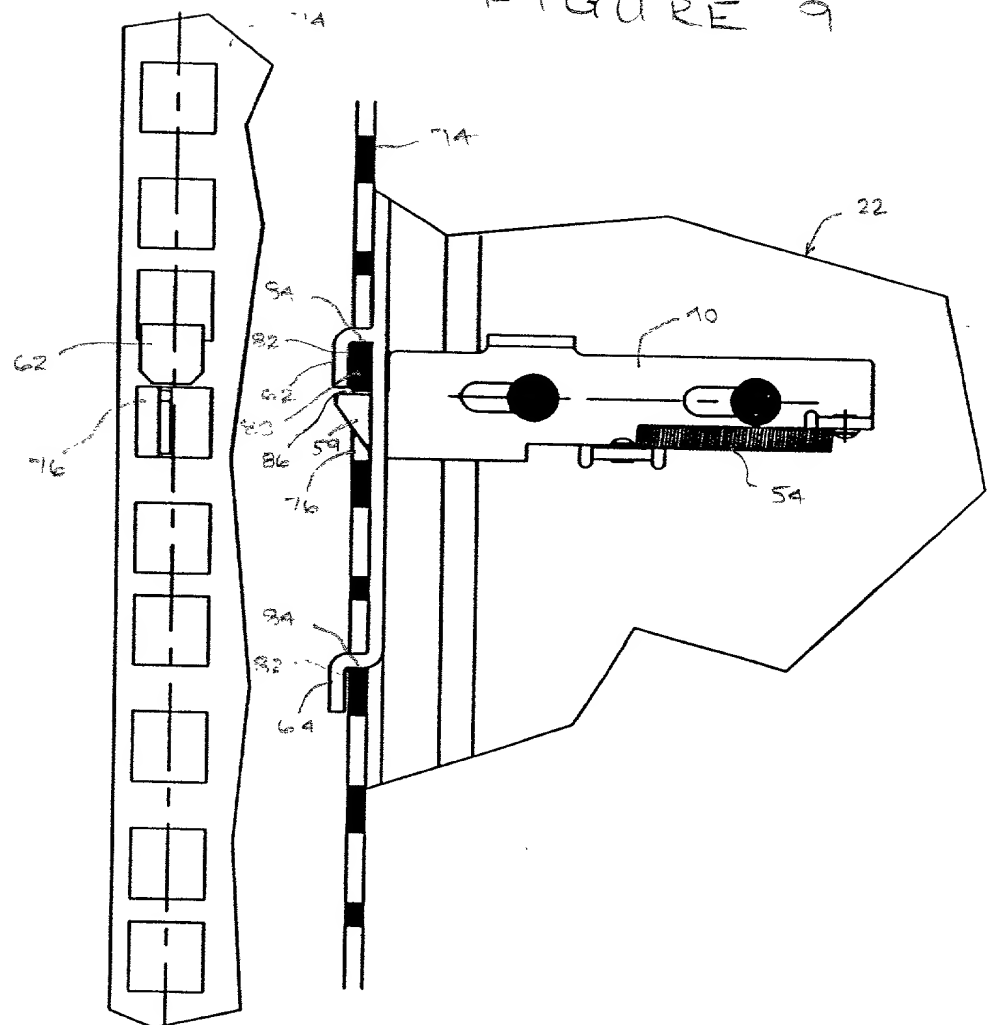


FIGURE 8

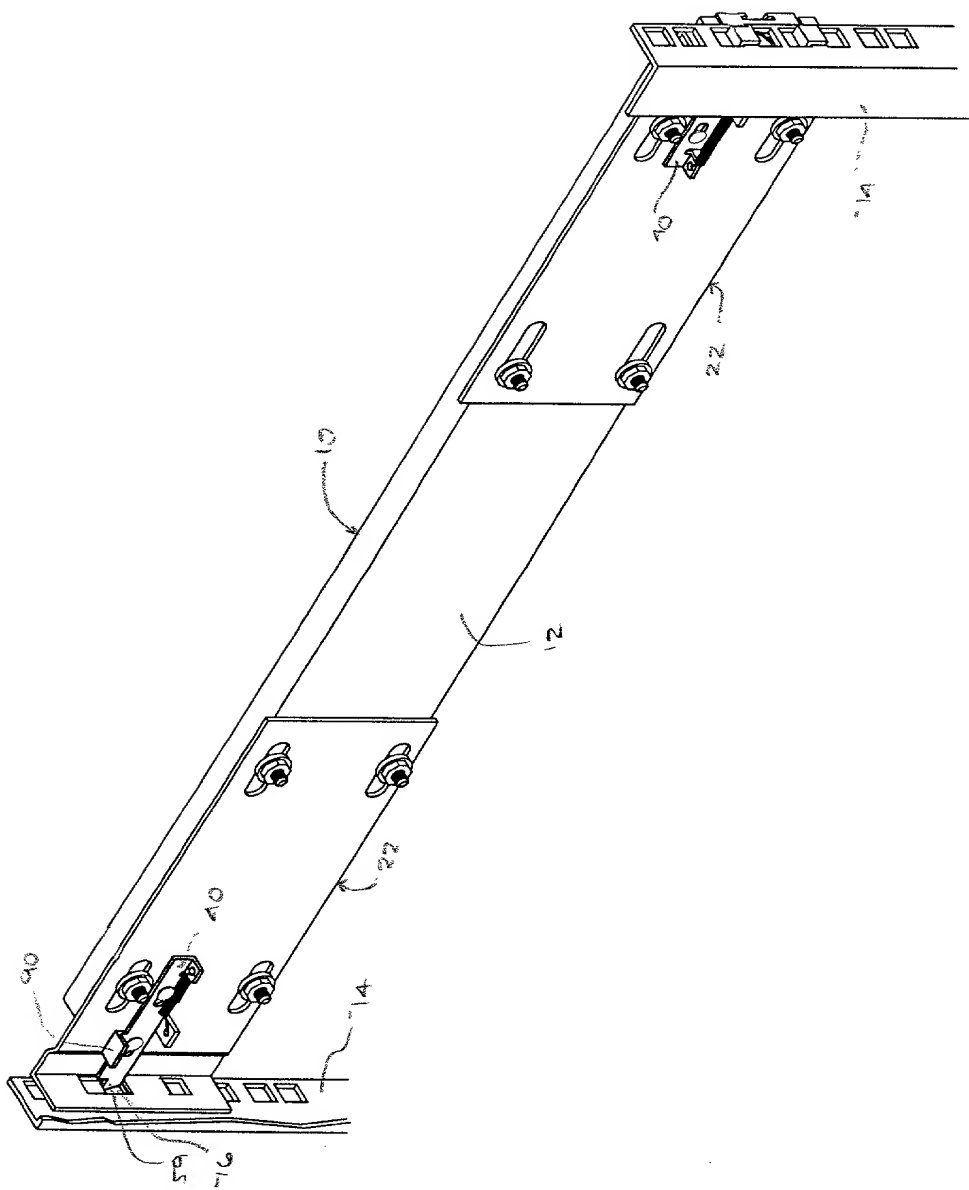


10

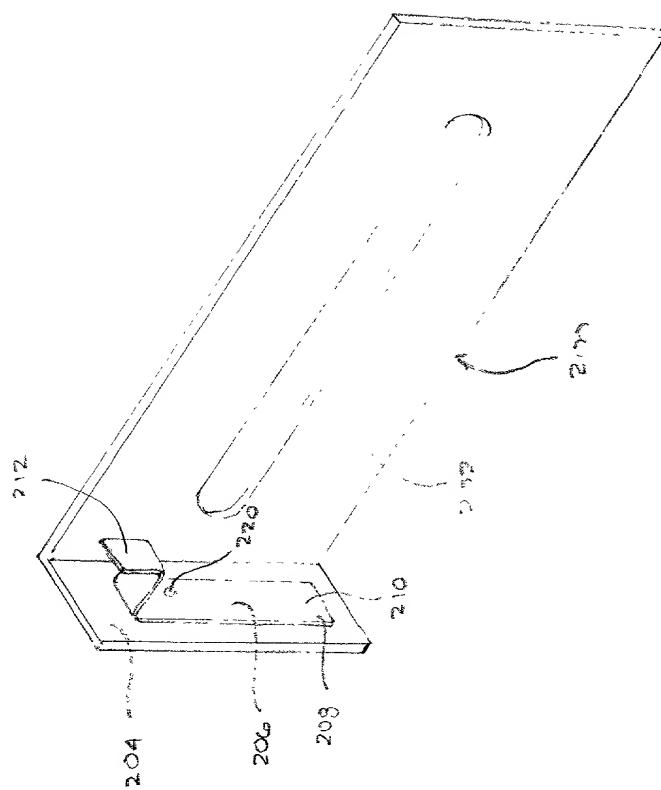

11451

(TRIOR 127)

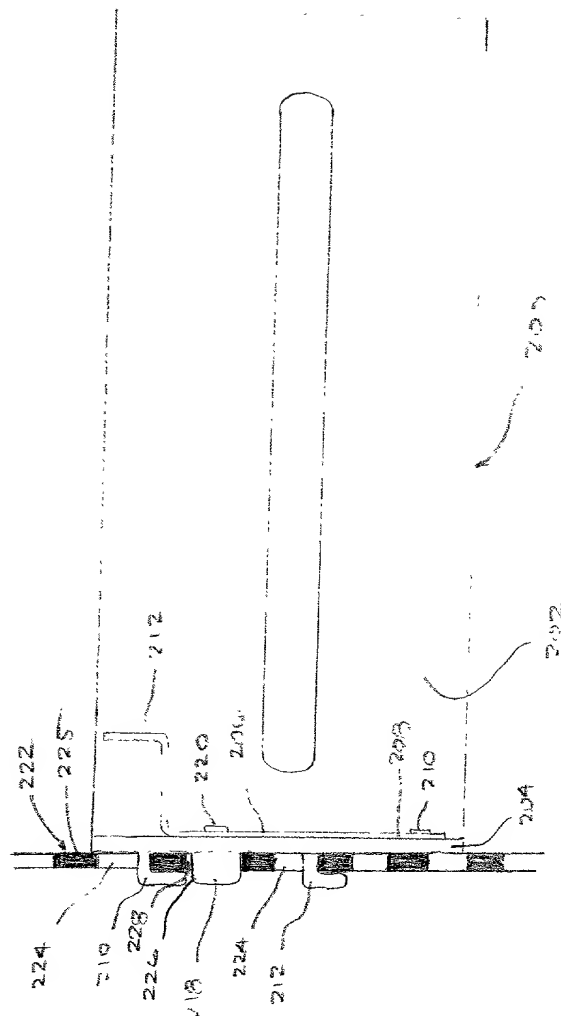[illegible]

FILE 12

(PRIOR ^{to} 1947)

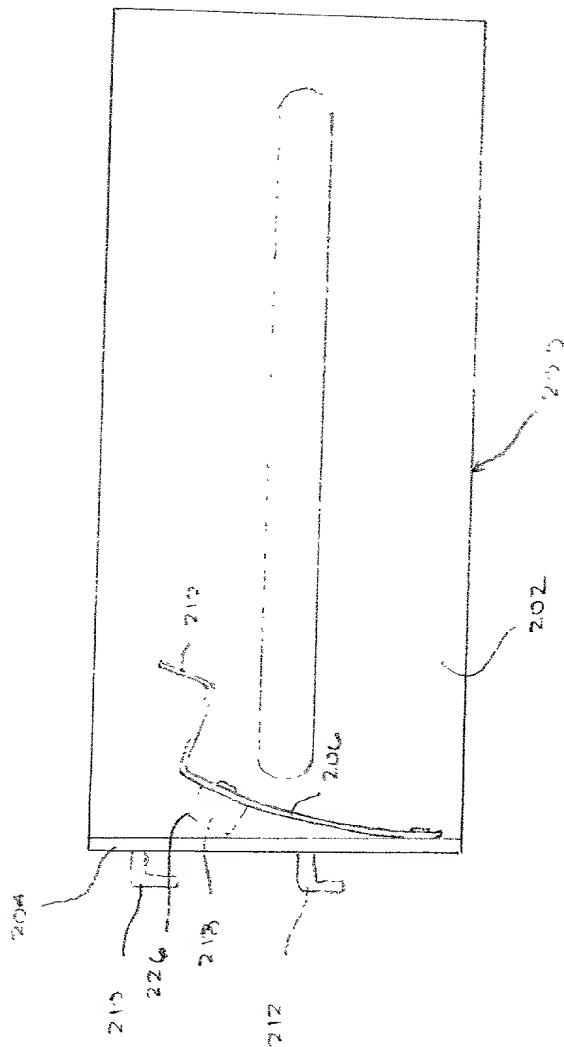


FIGURE 13

(PRIOR ART)

FIG. 14 is a perspective view of the assembly of FIG. 13, showing the assembly of the first and second rails 10 and 12, the first and second end plates 14 and 16, and the first and second end caps 18 and 20.

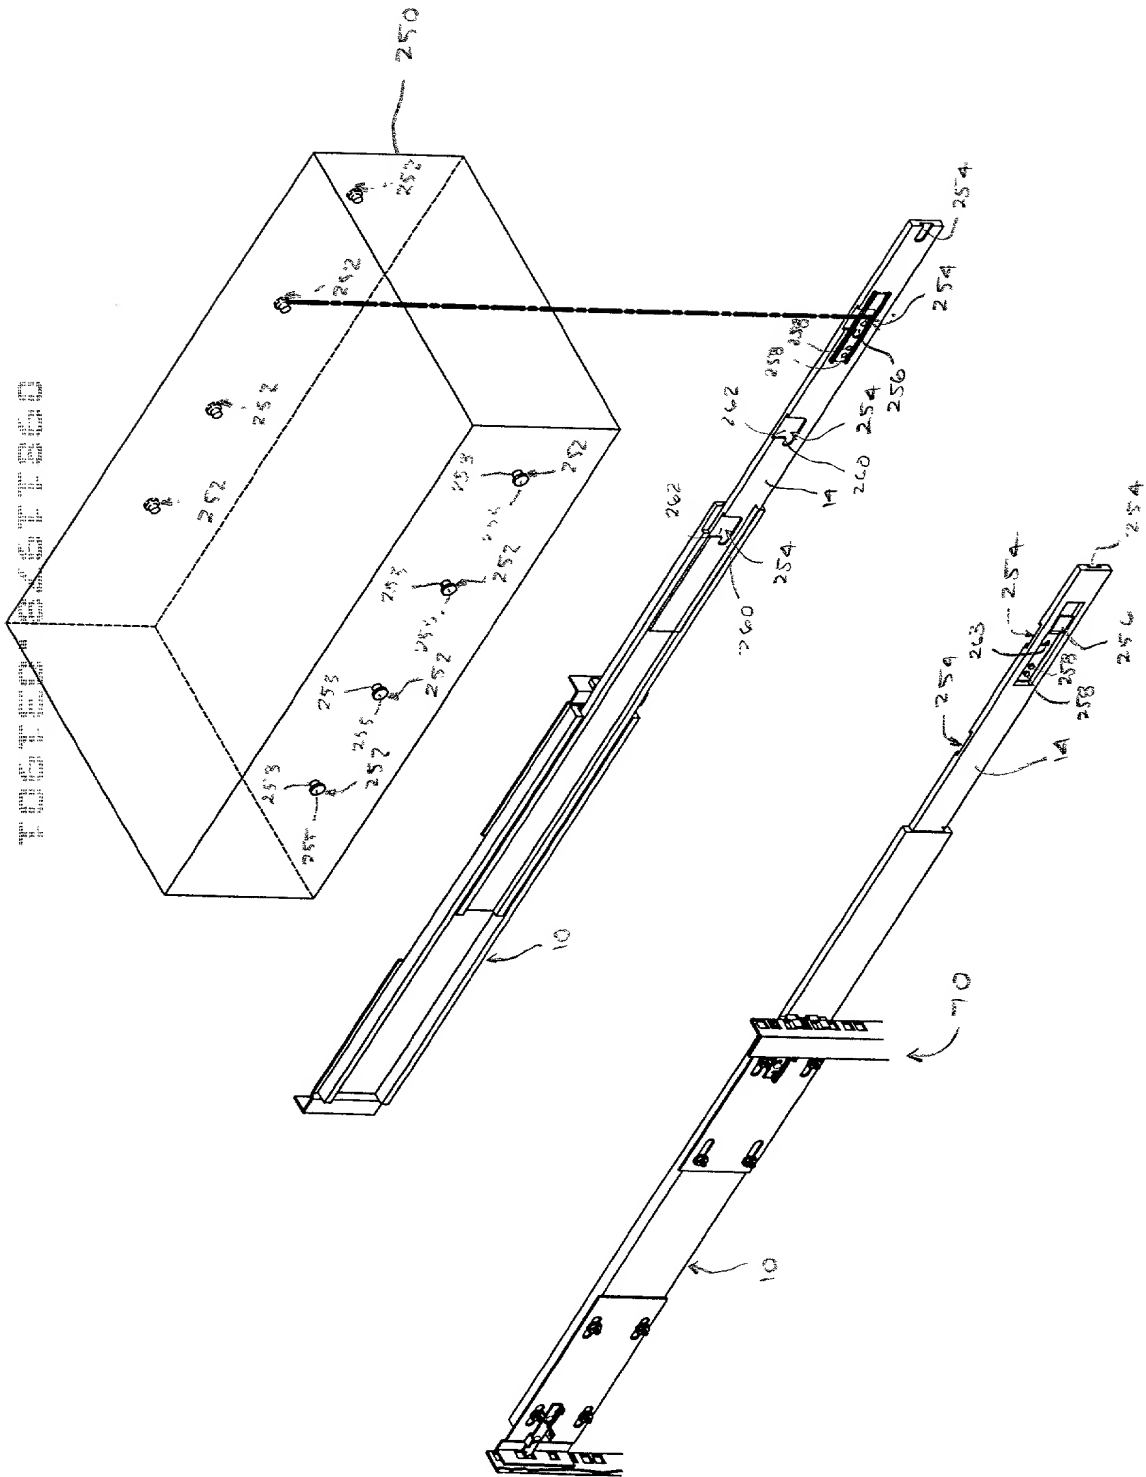


FIG. 15 is a perspective view of the assembly of FIG. 14, showing the assembly in a closed position. The assembly includes a housing 250, a door 252, and a latch 254. The door 252 is shown in a closed position, and the latch 254 is shown in a locked position. The assembly is shown in a perspective view, and the components are labeled with reference numerals.

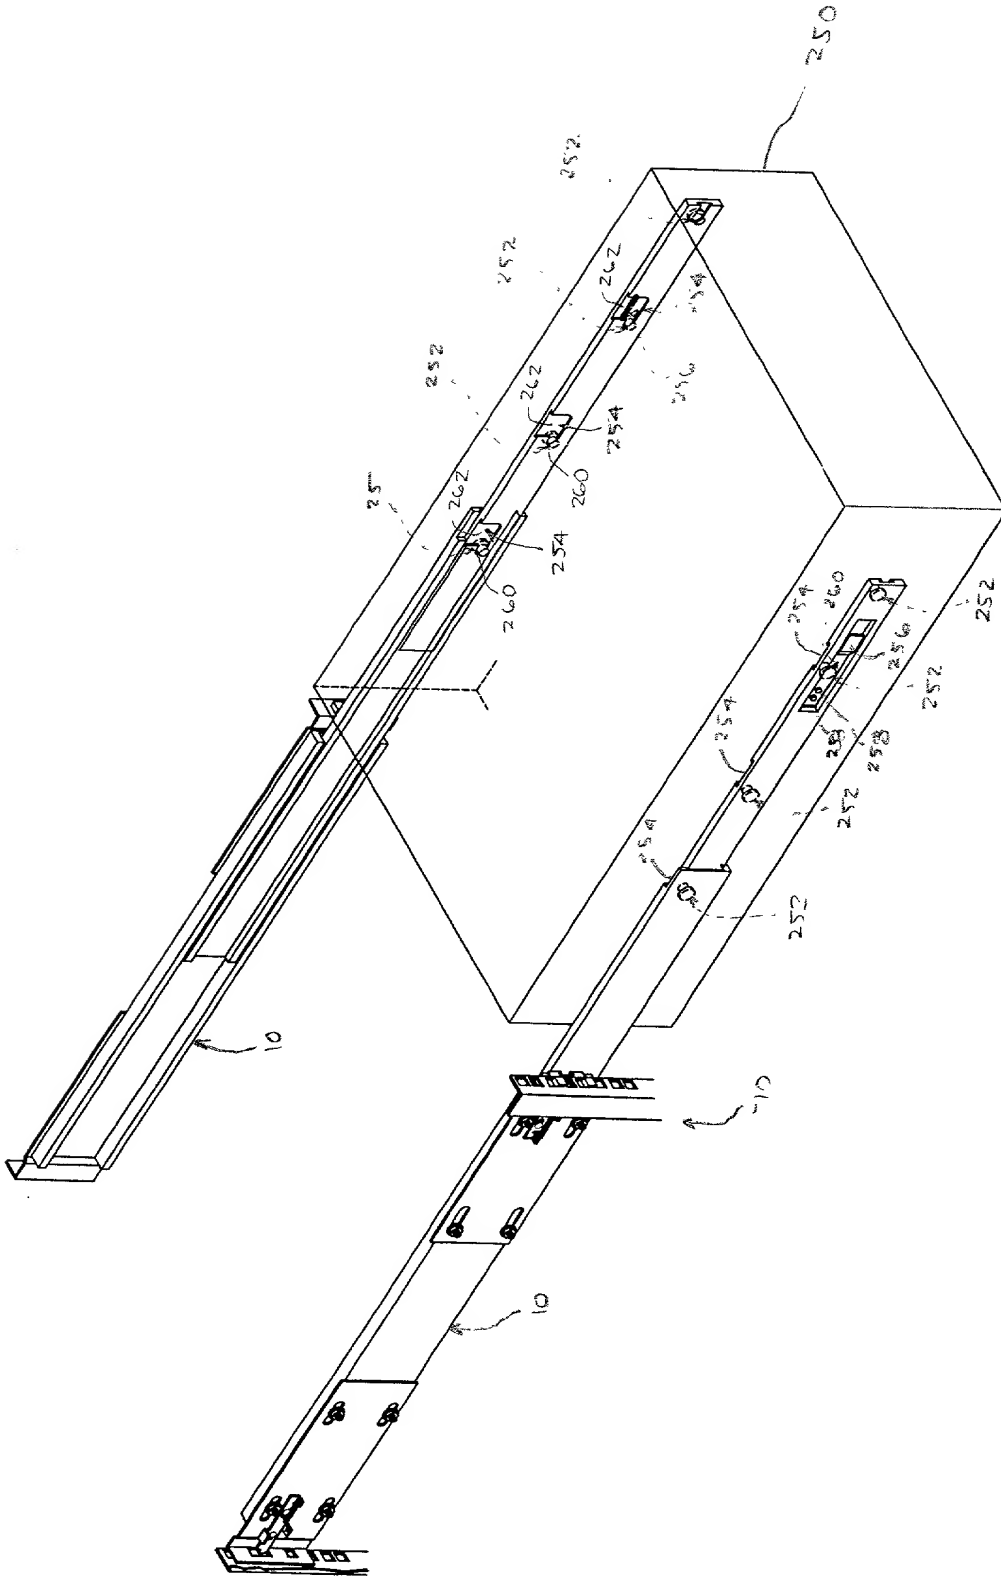


FIG. 15

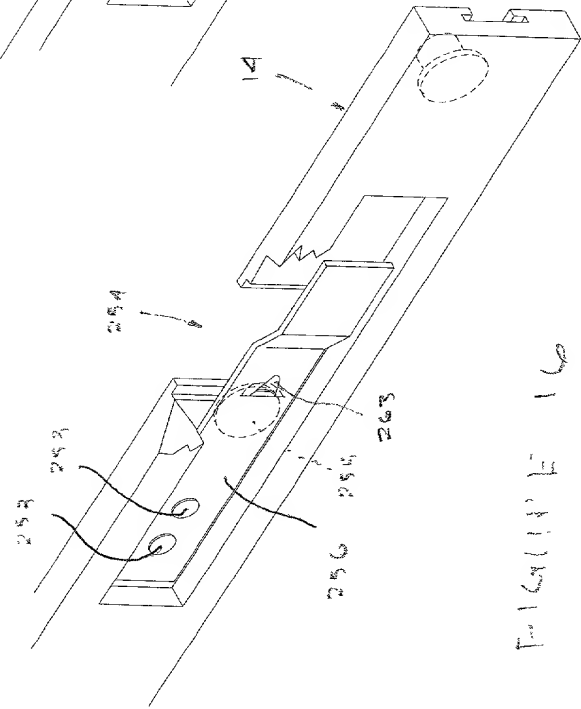


FIGURE 16



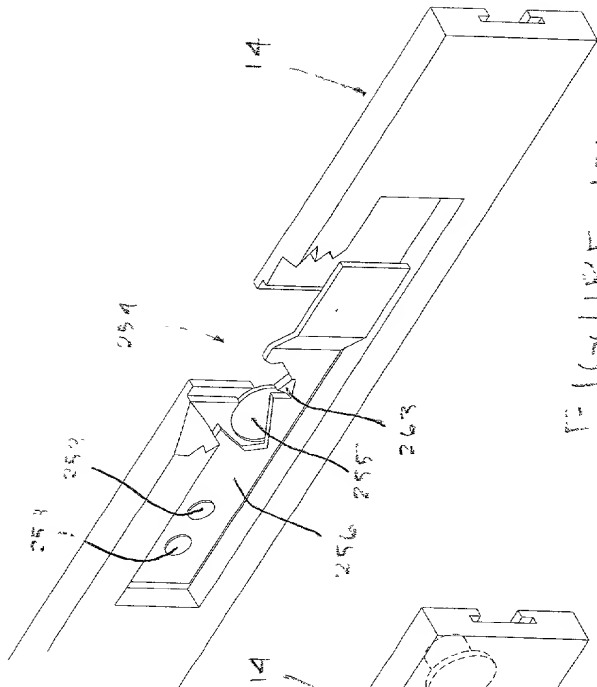


FIGURE 17

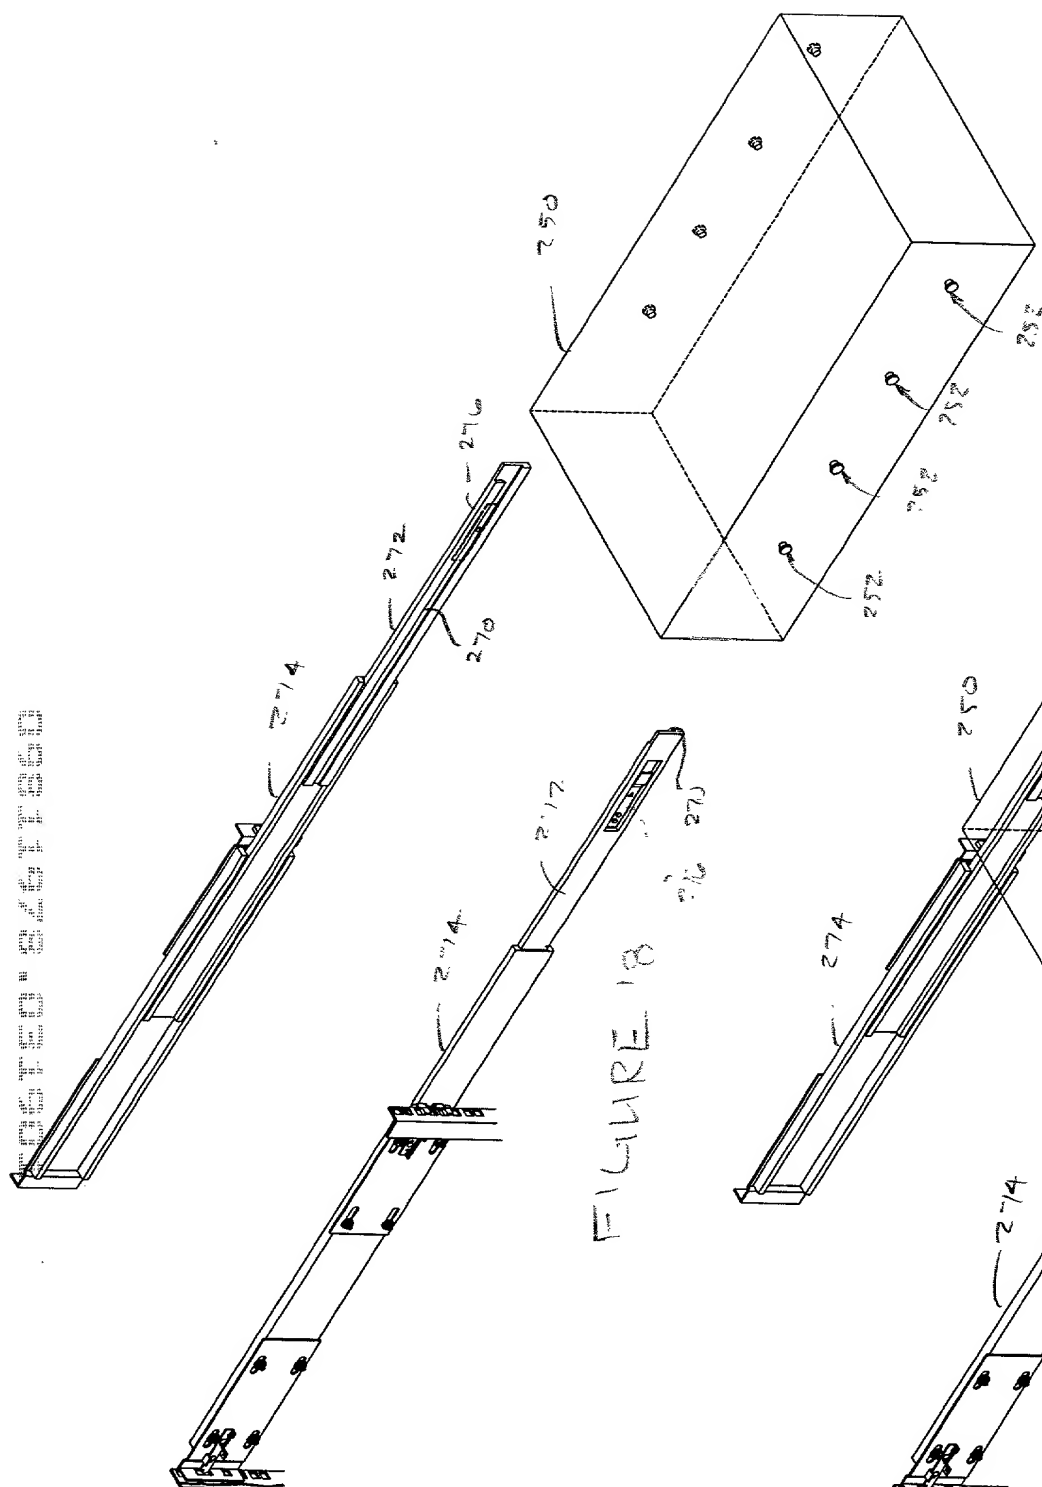

FILE 100

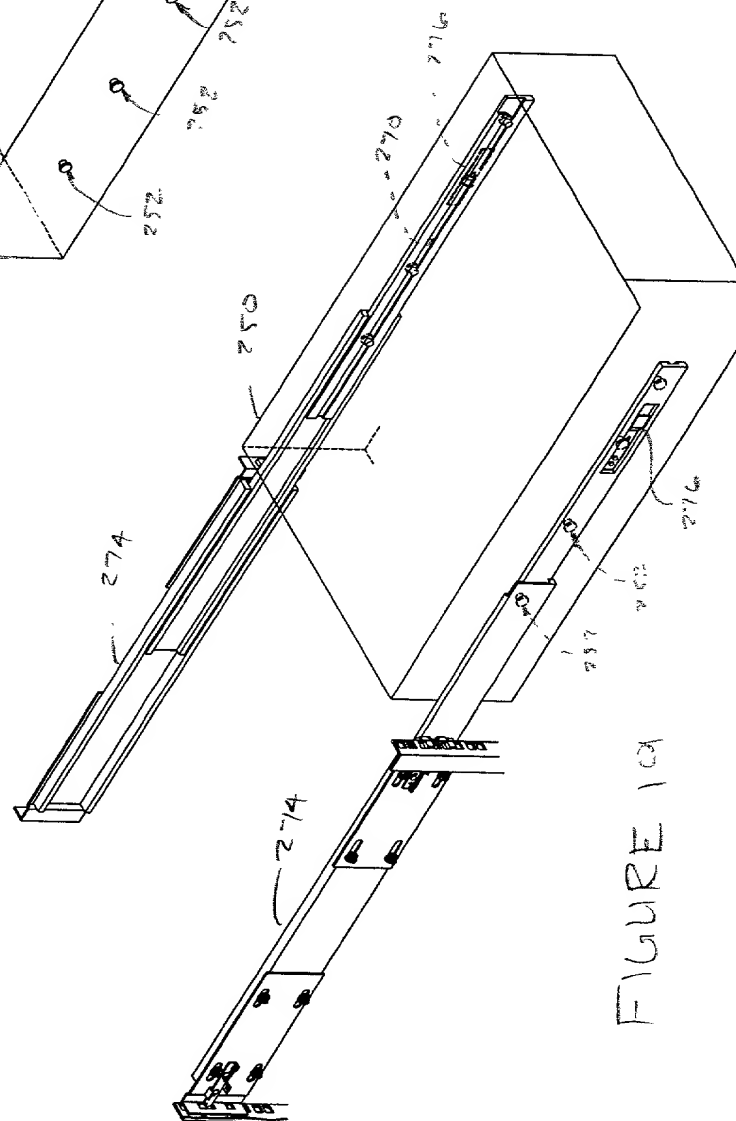


FIGURE 10